


## 双级破碎机

Double stage crusher

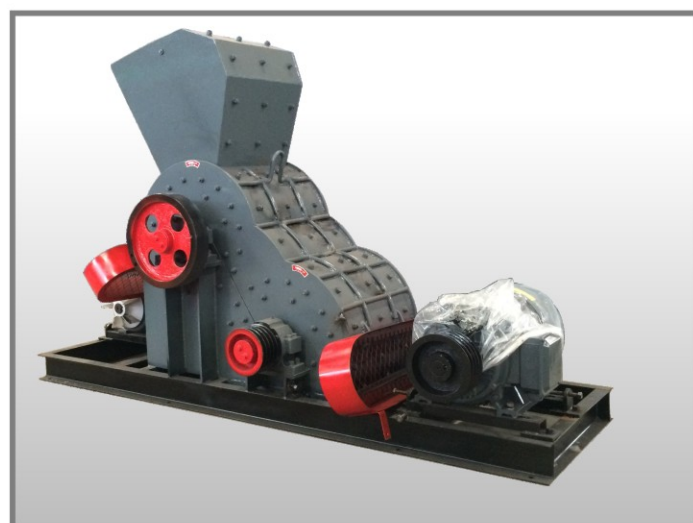

### 双级破碎机 >>

双级破碎机有双料腔，两个转子同时破碎，达到锤粉料，料粉料的双级破碎功能，使破碎物料的细度更加均匀，产量可提高50%，故名为双级破碎机。双级破碎机的设计，没有筛网，对含水量没有要求，不会出现糊堵筛网的情况。

### Double stage crusher


Double stage crusher has two chambers. Inner two rotors work at same time, and reach to hammer crush material, material crush material purpose. The final crushed material fineness is more uniform, and capacity can improve 50%, so is named double stage crusher. Double stage crusher is designed without screen mesh, and ask free moisture content, so eliminate the block problem in process.

### 主要技术参数 / Main technical parameter

型号 Model	进料粒度 (mm) Input Size	出料粒度 (mm) Output Size	生产能力 (t/h) Capacity	允许物料 含水量 Max. Moisture Content	配用电机 (kw) Matched Motor	外形尺寸 (mm) Overall Size
2PC600*400	≤100	≤3mm 0.5-1.075mm 50%	12-25	≤20%	18.5+22	2350*926*1630
2PC600*600	≤100	0.6-2mm 35% 2-3mm 15%	20-30		22+30	2875*1300*1650
2PC800*600	≤100	可根据需要调整出料粒度 adjust outputsize	35-55		37+55	3625*1314*2065
2PC800*1000	≤100	according to requirement	60-90		55+75	3850*1750*2280

## 复合破碎机

Compound crusher

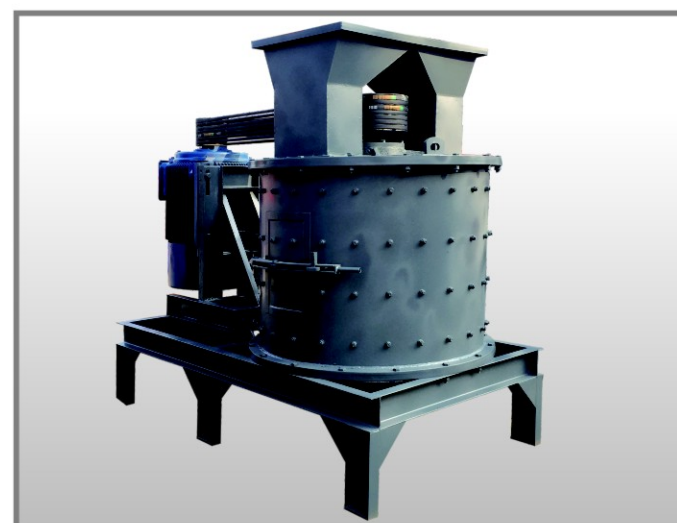

### 复合破碎机 >>

复合破碎机主要用于中等粒度和熟料的破碎，针对煤矸石，焦粉，铁矿粉等干燥的小颗粒物料进行粉碎，根据里面锤头的数量调整，可调节产量和颗粒度，一般破碎颗粒度5毫米以下，满足压球机的喂料粒度要求。

### Compound crusher

Compound crusher is mainly used for medium-sized particles and clinkers crushing, like coal gangue, coke powder, iron ore powder, etc. The capacity and discharging size can be controlled through plus or minus hammer numbers. Normally finished size is <5mm, and rightly meet briquette machine inputting size.

### 主要技术参数 / Main technical parameter

型号 Model	生产能力 (t/h) Capacity	给料粒度 (mm) Input size	出料粒度 (mm) Output size	主轴转速 (r/min) Main Shaft Speed	配用电机 (kw) Matched Power	外形尺寸 (mm) Overall size
PFL-600	5-12	< 100	< 5	1000	11	1900*1100*1500
PFL-800	10-20	< 120	< 5	934	22	2100*1200*1700
PFL-1000	20-40	< 150	< 5	769	45-55	2600*1400*1900
PFL-1250	40-70	< 180	< 5	530	75	2800*1600*2100
PFL-1500	70-100	< 200	< 5	495	110	3100*1900*2200